

Electra Slim Plus 8024

Product code: 01-009-007-24-080





Input parameters

Voltage range: 170~250 V AC
Frequency range: 50~60 Hz
AC current: 0.70 A / 230 V AC
Inrush current: 40A / 230VAC
Leakage current: 1mA / 230VAC

Standby power consumption: <3.2W
Efficiency 86%
Power factor: >0.55

Output parameters:

DC voltage: 24 V DC
Rated current: 3.34 A
Rated power: 80 W

Ripple&noise(max.): <100mVp-p

Setup, rise time(max.): 1500ms, - / 230VAC

1

Hold up time Load regulation: ±1%
Line regulation: ±1%
Regulation summary: ±2%

Environment

Working Temp.&Humid.: -25~50°C; 20~98% RH
Storage Temp.&Humid.: -40~80°C; 10~98% RH

Vibration: - Max. Case Temperature: 70°C

lsolation:

Withstand voltage: input-ouput:AC3.75KV

Isolation resistance input-ouput: DC500V $100M\Omega$ (at room temp. & humid.)

Protection

Short circuit: recovers automatically after fault condition is removed; hiccup mode

Over load: over 110% of rating recovers automatically after fault condition is removed

Over voltage: Over current: Over Temperature: -


Others


IP: **IP67**

Dimension: 182 x 40 x 22 mm

Power connection - wires: input: 3x0.75mm2 L200mm, output:: 2x.75mm2 L200mm

Weight: 0.310 kg
Packing: 50 pcs
Warranty: 3

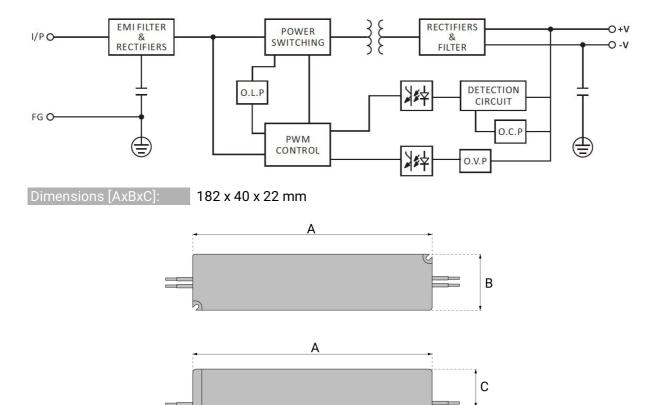

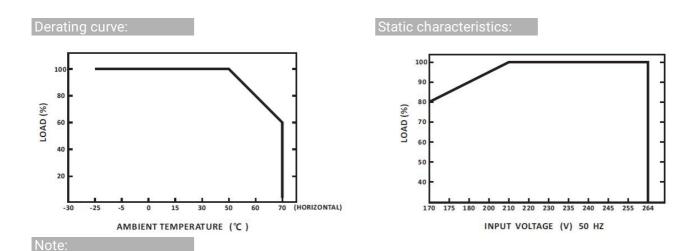

В

C

The given parameters (unless otherwise stated) were measured for a supply voltage of 230V AC, at nominal load in laboratory conditions, at an ambient temperature of 25°C.

The power supply is not an independently operating device, it is designed to work as a component of devices and installations. The EMC interference level of the power supply unit may depend on the nature of the receiver connected to it, and the total interference of the entire system also includes interference generated by other elements included in its composition.

The purpose of the power supply for LED lighting products may vary by region and local requirements. Before purchasing, verify the possibility of using the power supply to power LED products based on the legal requirements in the country of destination.